

Installation guidelines

LEAFIELD litter bins

Consort




Cleaning Products should be flushed with clean water and then washed with a mild detergent solution using a bristle brush or sponge. Care should be taken not to apply undue pressure that may damage labels. Flush clean with water after washing.



Quality Standards All Leaffield Environmental products are certificated to BS EN ISO



Tools Chalk, hammer drill, 12mm masonry drill bit, mallet, 17mm socket,
Key:



PPE Always wear appropriate PPE equipment and follow safety guidelines

Preparation




Position the ballasting base so that the locking pin faces the direction that the lock on the bin will face

Using chalk, mark the position through the three holes onto the ground bellow

Remove ballast cartridge and clearly mark the ground in the three hole positions with a cross

Ground fixing kit and ballasting additional components: Available as optional extra.
Gravel for ballasting should be supplied by the contractor

Ground fixing bolt




X3

Washer



X3

Ballast bung



(fitted to ballast cartridge)

X1



Ground fixing to asphalt is not recommended

Drilling holes and inserting bolts



Drill 12mm holes in the three marked positions to a depth of 100mm to accommodate the bolt length, remove debris from holes



Re-position the base over the drilled holes. Add washers to bolts and push through moulded holes in base locating into drilled ground holes




Using a mallet drive the bolts home

Tightening bolts



Use a spanner or socket to tighten the bolts

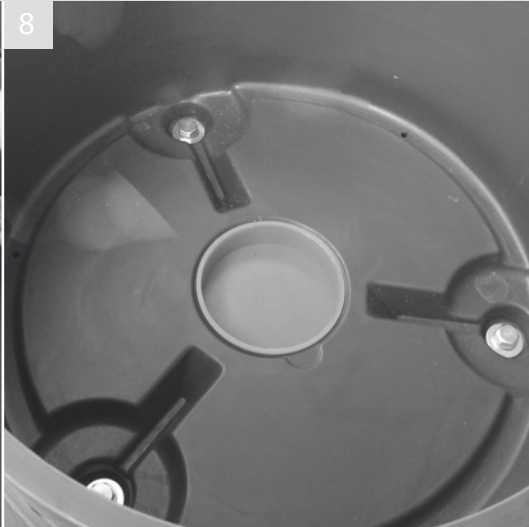

Tighten the bolts to 22.0Nm torque for concrete. Tightening the bolts will fan out the bolt sheath in the hole holding the bolt secure



Replace liner and hood. With hood resting on base rotate hood clockwise until lock is heard to engage

Filling ballast cartridge



Remove cap from integral ballasting base and pour gravel into the center



Disperse the gravel equally across the bottom of the base fill until gravel is level with the top of the raised level indicator



Replace liner and hood. With hood resting on base rotate hood clockwise until lock is heard to engage



post
Leafield Way, Leafield Industrial Estate
Corsham, Wiltshire SN13 9UD



telephone
+ 44 (0)1225 816500



facsimile
+ 44 (0)1225 816501



website/email
www.leafield-environmental.com
envinfo@leafieldenv.com

