

Installation guide

Square Heritage

LEAFIELD litter products




Tools Chalk, Hammer, drill, 16mm masonry drill bit, 17mm socket or spanner, plastic Key (as supplied)



Ground fixing kit - available as an optional extra.

Ground fixing
bolt x 4

Washer
bolt x 4



Note: Ground fixing to asphalt is not recommended (concrete or paving slab base recommended)



Quality Standards All Leaffield Environmental products are certificated to BS EN ISO



PPE Always wear appropriate PPE equipment and follow safety guidelines.



Cleaning Products should be rinsed with clean water and then washed with a mild detergent solution using a bristle brush or sponge. Care should be taken not to apply undue pressure that may damage labels. Flush clean with water after washing. Non heated pressure washer can be used at no closer the 400mm away from the unit. The Pressure should be no more than 100 Bar.

Preparation



Position the bin so that the bin door faces the correct direction and does not obstruct when door is open.



Using chalk, mark the position through the four holes in the bin base onto the ground below.



Remove bin body and clearly mark the ground in the four hole positions with a cross.



Post
Leaffield Way
Leaffield Industrial Estate
Corsham, Wiltshire SN13 9UD



Telephone
01225 816541
Fax
01225 816501




Email
envinfo@leaffieldenv.com



Website
www.leaffield-environmental.com



Drilling holes and inserting bolts

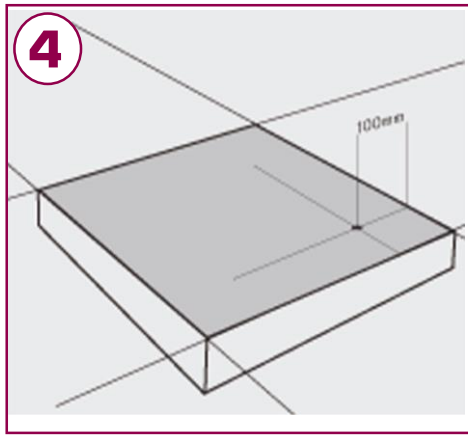

On the paving slab surface, make sure the marked positions are not within 100mm of the edge of the slab as cracking could occur.



Drill 16mm (must be 16mm dia) holes in the four marked positions to the depth of 100 mm. Remove debris from holes.



Re-position the bin over holes. Add washers to the bolts & push through moulded holes in bin base & into the drilled ground holes.

Tightening bolts



Using the mallet drive the bolts home.



Tighten the bolts to no 22.0Nm torque for concrete. Tightening the bolts will fan out the bolt sheath in the hole holding the bolt secure.



Replace liner and shut door.

Ballast filling (alternative to bolt down fixing)



Remove ballast plug from the bottom of the bin and fill with a suitable waste material.



Spread the ballast material by hand or tip the bin base in order to distribute the material and reinsert the ballast plug.



Replace liner and shut door.



Post
Leafield Way
Leafield Industrial Estate
Corsham, Wiltshire SN13 9UD



Telephone
01225 816541
Fax
01225 816501



Email
envinfo@leafieldenv.com



Website
www.leafield-environmental.com

