Installation guide

Octaplus Midi



LEAFIELD litter products



Cleaning Products should be rinsed with clean water and then washed with a mild detergent solution using a bristle brush or sponge. Care should be taken not to apply undue pressure that may damage labels. Flush clean with water after washing.



Tools Chalk, Hammer, drill, 12mm masonry drill bit, 12.5mm drill bit, 17mm socket or spanner, Key.



Quality Standards All Leafield Environmental products are certificated to BS EN ISO






PPE Always wear appropriate PPE equipment and follow safety guidelines.

Marking out holes



metal bracket so that it aligns with the lock hole in base of bin. in body (as shown).





To insure the correct bin allignment, place the Using the plate as a guide drill 3 x 13mm holes Mark the position through the three holes onto the ground below using the bracket as a guide.



Post Leafield Way Leafield Industrial Estate Corsham, Wiltshire SN13 9UD



Telephone 01225 816500 Fax 01225 816501




Email litter@leafieldenv.com



www.leafield-environmental.com



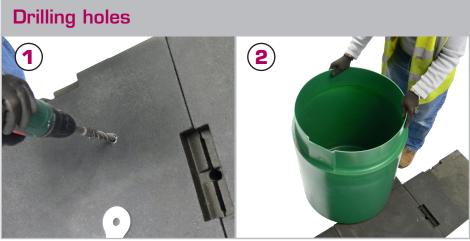

Drill 3 x 12mm holes in the ground to a depth of 100mm to accommodate the bolt length and remove debris from holes.

Place bin base over drilled holes

Affixing to floor



Place anchor plate inside bin over the drilled holes

Insert fixings through the anchor plate and bin base and into the drilled holes. A hammer may be required. Replace liner and hood. (LOCK)

Contents: From left to right:

3 x 12mm x 110mm fixings 1 x anchor plate





Post Leafield Way Leafield Industrial Estate Corsham, Wiltshire SN13 9UD



Telephone 01225 816500 Fax 01225 816501



Email litter@leafieldenv.com



www.leafield-environmental.com

