Installation guide





Cleaning Products should be rinsed with clean water and then washed with a mild detergent solution using a bristle brush or sponge. Care should be taken not to apply undue pressure that may damage labels. Flush clean with water after washing.



Quality Standards All Leafield Environmental products are certificated to BS EN ISO



Tools Chalk, Hammer drill, 15mm masonry







PPE Always wear appropriate PPE equipment and follow safety guidelines.



Position the body in the required location and orientation, mark through the holes in the base to the ground below



Using chalk mark the position through the four holes in the bin base onto the ground below.

Ground fixing kit and ballasting addional components:




Move the bin to one side and clearly mark the ground in the four hole positions with a cross.

Please Note:

Gravel should be supplied by contractor.

Ground fixing to asphalt is not recommended.

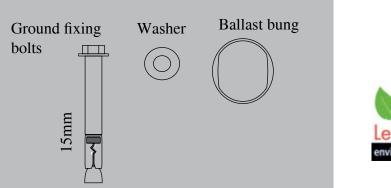



Drilling holes and inserting bolts




Drill 15 mm holes in the four marked positions to a depth of 110mm to accommodate the bolt length. Remove debris from the holes.

Re-postion the bin over the drilled holes. Add washers to bolts and push through moulded holes locating into drilled ground holes beneath.

Using a mallet drive the bolts home.



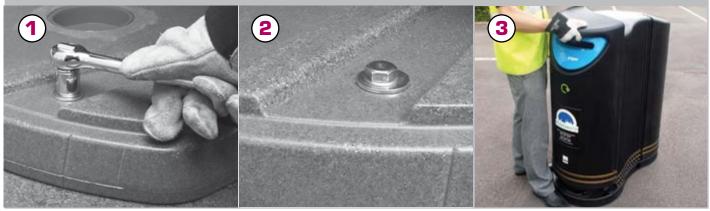

Use a spanner or socket to tighten the bolts.

Tighten the bolts to 22.0Nm torque for concrete. tighten the bolts will fan out the bolt sheath in the hole holding the bolt secure.

Replace liner and shut the door.



Remove bottom cap and pour gravel into hole.

Clear the hole of gravel so that the gravel level is 30mm from the top of the surface to accomodate the ballast cap.



Post

Leafield Way, Leafield Industrial Estate Corsham, Wiltshire, SN13 9UD



Telephone 01225 816541



Fax Website/email 01225 816501 www.leafield-environmental.com recycle@leafieldenv.com



